



Table of Contents	Page
-------------------	------

Corrosion-Resistant Straight Blade Devices


15 and 20 Amp 125V, 2-Pole 3-Wire Grounding	I-2
15 and 20 Amp 250V, 2-Pole 3-Wire Grounding	I-2

Corrosion-Resistant Locking Devices

15 Amp 125V, 2-Pole 3-Wire Grounding	I-3
20 Amp 125V, 2-Pole 3-Wire Grounding	I-3
30 Amp 125V, 2-Pole 3-Wire Grounding	I-3

Accessories

Weather Protective Boots.	I-4
-----------------------------------	-----

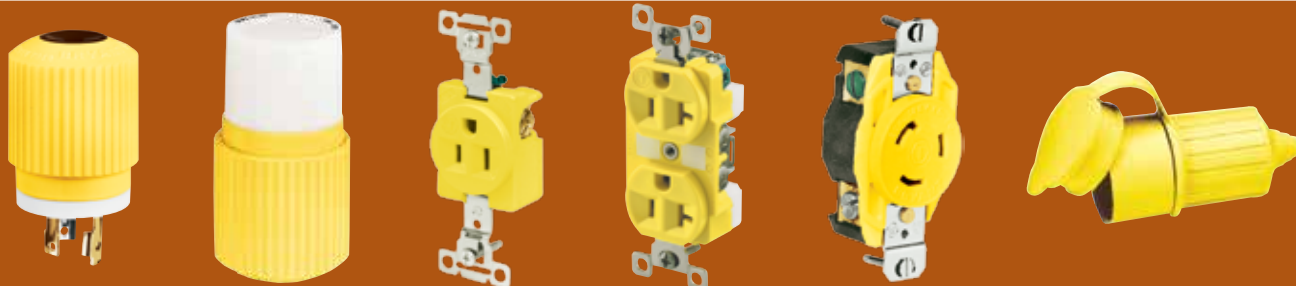

Corrosion-Resistant Devices



15 and 20 Amp Straight Blade Devices



- Nickel-plated copper-alloy metallic components
- Molded of impact/chemical resistant high-visibility yellow nylon
- Stainless steel screws
- Receptacles have a one-piece grounding system with built-in self-grounding strap
- Triple Gripper® cord grip on plugs and connectors which feature three captive assembly screws to automatically tighten cord grip
- Pre-attached thermoplastic elastomer dust seal

15A and 20A Straight Blade Plugs, Connectors and Receptacles Inches (mm)

TECH·SPEC®




Rating	Cord Diameter	Poles/Wires	Color	Nylon Polymer Plug	Nylon Polymer Connector	Nylon Receptacle, Back and Side Wired	
						Single	Duplex
NEMA 5-15 15A 125V Plug Connector	.300"-.625" (7.6-15.9)	2-Pole 3-Wire	Yellow Brown	BRY5266NPCR —	BRY5269NCCR —	5261CR* —	BRY5262CR BRY5262BCR
NEMA 5-20 20A 125V Plug Connector	.300"-.625" (7.6-15.9)	2-Pole 3-Wire	Yellow	BRY5366NPCR	BRY5369NCCR	5361CR*	BRY5362CR
NEMA 6-15 15A 250V Plug Connector	.300"-.625" (7.6-15.9)	2-Pole 3-Wire	Yellow	—	—	—	BRY5662CR
NEMA 6-20 20A 250V Plug Connector	.300"-.625" (7.6-15.9)	2-Pole 3-Wire	Yellow	—	—	5461CR*	BRY5462CR


Note: *Not Fed. Spec.
See page A-27 for information on weather protective boots.
See page R-8 for horsepower ratings.

Product Dimensions Inches (mm)


Plug	
A	2.18" (55.4)
B	1.38" (35.1)
C	1.52" (38.5)




Connector	
A	2.95" (74.9)
B	1.38" (35.1)
C	1.52" (38.5)



	Receptacle	
	Single	Duplex
A	4.06" (103.1)	4.06" (103.1)
B	3.28" (83.3)	3.28" (83.3)
C	1.38" (35.1)	1.54" (39.1)
D	.91" (23.1)	.92" (23.4)
E	1.78" (45.2)	2.69" (68.3)



BRY5361CR



BRY5262CR

Corrosion-Resistant Devices



15, 20 and 30 Amp Locking Devices



- Nickel-plated copper-alloy metallic components
- Molded of impact/chemical resistant high-visibility yellow nylon
- Stainless steel screws
- Receptacles have a one-piece grounding system with built-in self-grounding strap
- Triple Gripper® cord grip on plugs and connectors which feature three captive assembly screws to automatically tighten cord grip
- Individual wire pockets with clamp-type terminals

15A, 20A and 30A Locking Plugs, Connectors, Receptacles and Cord Set Inches (mm)

TECH-SPEC®



Rating	Cord Diameter	Poles/Wires	Color	Clamp-Type Terminals, Back Wired		Nylon Receptacle	
				Nylon Plug	Nylon Connector	Single, Back and Side Wired	Duplex, Back Wired, Clamp-Type Terminals
NEMA L5-15 15A 125V Plug Connector	.300"-.625" (7.6-15.9)	2-Pole 3-Wire	Yellow	4721NPCR*	4732NCCR*	4710CR*	4700DRCR
NEMA L5-20 20A 125V Plug Connector	.300"-.950" (7.6-24.1)	2-Pole 3-Wire	Yellow	70520NPCR*	70520NCCR	70520FRCR	—
NEMA L5-30 30A 250V Plug Connector	.300"-.950" (7.6-24.1)	2-Pole 3-Wire	Yellow	70530NPCR	70530NCCR	70530FRCR	—
Description			Color	Cord Set			
Pre-wired 25 ft. cord set #10 AWG, 3 conductor STO			Yellow	530MCS25*			

Note: *Not Fed. Spec.
See page A-47 for information on weather protective boots.
See page Q-8 for horsepower ratings.

Product Dimensions Inches (mm)

Plug			Single Receptacle			Duplex Receptacle
	15A	20A/30A		15A	20A/30A	15A
A	2.18" (55.2)	2.85" (72.3)		3.28" (83.3)	3.28" (83.3)	3.28" (83.3)
B	1.38" (35.1)	1.83" (46.5)		2.38" (60.5)	2.38" (60.5)	2.74" (69.5)
C	1.53" (39.1)	2.13" (54.0)		1.38" (35.1)	1.56" (39.6)	1.70" (43.2)
				1.41" (35.8)	1.70" (43.2)	1.17" (29.67)
				1.37" (34.8)	2.67" (67.8)	.93" (23.72)
				1.01" (25.7)	1.24" (31.5)	—
Connector			4710CR			4700DRCR
	15A	20A/30A		15A	20A/30A	15A
A	2.95" (75.0)	3.90" (99.0)				
B	1.38" (35.1)	1.83" (46.5)				
C	1.53" (39.1)	2.13" (54.0)				



- For use with Bryant Tech-Spec® straight blade and locking plugs and connectors
- Help prevent moisture, dust and other contaminants from infiltrating plugs and connectors
- Thermoplastic elastomer construction in high-visibility yellow or standard black
- Excellent ozone and weather resistance and resistant to deterioration by oils and heat
- Connector sealing ring provides extra protection when plug and connector are not mated

Weather Protective Boots



72002BP



5200BPC



5200BSR

Description	For use with	Color	For Use with Plugs	For Use with Connectors	Sealing Cap for Use with Connector Boot
Thermoplastic elastomer boot	15 amp nylon straight blade and locking devices	Yellow	5200BP	5200BC	5200BSR
Neoprene boot	20 and 30 amp nylon locking plugs	Yellow	72002BP	72002BC	—

Weather Protective Boots



70530NPCR Plug
72002BP Boot



70530NCCR Connector
72002BC Boot

