




# BRYANT®

## Temporary Industrial Lighting

Flexible and Dependable  
Illumination for Construction  
Sites, Work Areas and  
Harsh Environments

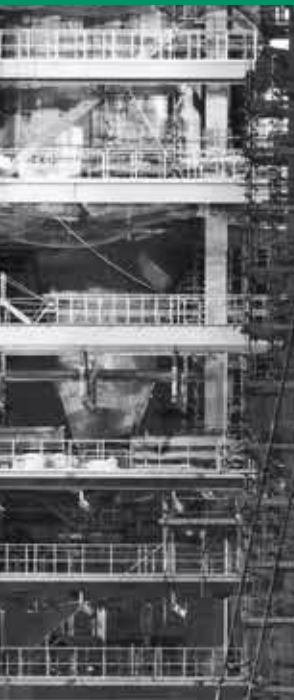

# Construction Site Lighting



Bryant's outdoor approved construction site lighting line includes both heavy-duty metal halide lights and light strings for working in rugged environments. The metal halide fixtures feature extremely strong and compact heads with bulbs rated to last 10,000 hours. All frames are powder-coated yellow for safety and are constructed of a durable 1.25 inch, 12 gauge steel tube.

Light strings for all applications are available in a variety of models as well as a choice of metal or plastic guards. Light sockets are spaced 10 feet apart and all sockets, plugs, and connectors are molded for added durability. In addition, the highly impact-resistant material makes for easy transportation and storage when not in use. Bulbs can be incandescent, fluorescent or LED. Consider choosing LED lighting for a durable bulb that saves energy, provides instant illumination and are rated to last 50,000 hours.

CONSTRUCTION SITE LIGHTING

## Metal Halide Lights

Description	Rating	Watts	Lumen Output	Cord Length	Catalog Number
5 -10 ft. metal halide cart light with portable detachable ballast	15A 125V	1,000	110,000	—	<b>BRYMH1000</b>
6 -12 ft. metal halide cart light	15A 125V	2,000	220,000	—	<b>BRYMH2000</b>
High bay metal halide light with wire guard	15A 125V	400	29,000	3 ft.	<b>BRYMH400</b>



**BRYMH1000**



**BRYMH400**

## LED Stringer Lights

Description	No. of Fixtures	Rating	Cord Type	Lumen Output	Cord Length	Catalog Number
90 LEDs per fixture, light string with magnetic base included	1	15A 125V	18/2 SJTW	450*	20 ft.	<b>BRY182S20LED</b>
90 LEDs per fixture, light string	5	15A 125V	18/2 SJTW	450*	50 ft.	<b>BRY182S50LED</b>
	10	15A 125V	18/2 SJTW	450*	100 ft.	<b>BRY182S100LED</b>
28W High power LED light string with in line ON/OFF switch	—	15A 125V	16 AWG SJTOW	2,928	6 ft.	<b>BRYLS2834</b>
Magnetic clip bracket for LED lights switch, single fixture	—	—	—	—	—	<b>BRYSTMC</b>

Note: \*Lumens per fixture.

## A Type (Edison) Locking and Straight Blade Light Strings

Description	Max Watts*	Rating	Cord Type	Fixtures	Cord Length	Catalog Number
Locking light string, plastic guards	150	20A 125V	12/3 STW	10	100 ft.	<b>BRY123S100PT</b>
	150	20A 125V	12/3 STJW	10	100 ft.	<b>BRY123SJ100PT</b>
Locking light string, metal guards	150	20A 125V	12/3 STW	10	100 ft.	<b>BRY123S100MT</b>
Straight blade light string, plastic guards	150	15A 125V	14/2 STJW	10	100 ft.	<b>BRY142SJ100PS</b>
	150	15A 125V	12/3 STW	10	100 ft.	<b>BRY123S100PS</b>
	150	15A 125V	12/3 STJW	10	100 ft.	<b>BRY123SJ100PS</b>
Straight blade light string, metal guards	150	15A 125V	12/3 STW	10	100 ft.	<b>BRY123S100MS</b>
Straight blade light string, plastic guards	150	15A 125V	12/3 STW	5	50 ft.	<b>BRY123S50PS</b>
Straight blade light string, metal guards	150	15A 125V	12/3 STW	5	50 ft.	<b>BRY123S50MS</b>
Replacement plastic guard for temporary light strings	—	—	—	—	—	<b>BRYSTPG</b>
Replacement heavy duty metal guard for temporary light strings	—	—	—	—	—	<b>BRYSTMG</b>

Note: \*Max watts per fixture.

## Fluorescent Light Strings

Description	Wattage	Rating	Cord Type	Lumen Output	Cord Length	Catalog Number
Fluorescent light string, 34.5 in. single fixture with hanging straps	50	15A 125V	16 AWG SJTOW	3,750	6 ft.	<b>BRYFS5035</b>
Fluorescent light string, 48.5 in. single fixture with hanging straps	25	15A 125V	16 AWG SJTOW	2,125	6 ft.	<b>BRYFS2549</b>



**BRY142SJ100PS**



**BRYFS2549**  
Straps not Shown

# Maintenance and Worklights

## LED Maintenance Worklights

Description	Outlet Rating	Rating	Wattage	Lumen Output	Cord Type	Cord Length	Catalog Number
LED Industrial maintenance light	N/A	15A 125V	28	2,928	16/3 SJEOW	25 ft.	<b>BRYML2825L</b>
LED worklight with end light feature	N/A	15A 125V	9	920/120	18/2 SJTOW	25 ft.	<b>BRYWL25LED</b>
LED worklight with end light feature and tool tap	12 Amp	15A 125V	9	920/120	16/3 SJTOW	25 ft.	<b>BRYWL25LEDT</b>

## Fluorescent Maintenance Worklights

Description	Outlet Rating	Rating	Wattage	Lumen Output	Cord Type	Cord Length	Catalog Number
Fluorescent worklight with straight blade plug	N/A	15A 125V	13	825	16/3 SJTOW	25 ft.	<b>BRYTW25F1</b>
Fluorescent worklight with locking plug and tool tap	12 Amp	20A 125V	13	825	16/3 SJTOW	25 ft.	<b>BRYTW25F2</b>
Fluorescent maintenance light, 34.5 in.	N/A	15A 125V	50	3,750	16/3 SJEOW	25 ft.	<b>BRYML5025</b>
Fluorescent maintenance light, 48.5 in.	N/A	15A 125V	25	2,125	16/3 SJEOW	25 ft.	<b>BRYML2525</b>
Fluorescent worklight, 45 in.	N/A	15A 125V	25	2,125	16/3 SJTOW	25 ft.	<b>BRYWL2525</b>

## Accessories and Replacement Parts

Description	Catalog Number
Magnetic mounting bracket for ML style lights, 82 lb. capacity	<b>BRYMLMM</b>
Magnetic mounting bracket for WL style lights, 58 lb. capacity	<b>BRYWLMM</b>
Replacement rough service fluorescent bulb for 13 watt style lamps	<b>BRYREPPFB</b>
Metal halide replacement bulb, 400W	<b>BRYREP400MH</b>
Metal halide replacement bulb, 1,000W	<b>BRYREP1000MH</b>
Replacement LED panel fixture, 90 LEDs, 450 lumen	<b>BRYREP450LED</b>
5 base LEDs string only, 50 ft., 18/2	<b>BRYREP182S50</b>
10 base LEDs string only, 100 ft., 18/2	<b>BRYREP182S100</b>



## Explosion Proof/Confined Space Lighting

### Hazardous Location Lights

Description	Wattage	Lumen Output	Cord Type	Cord Length	Catalog Number
Fluorescent, Class 1, Div 1 Groups C & D, Class 2, Div 1 Groups F & G, 12V, inline transformer	26	1,800	16/3 SOW	60 ft.	<b>BRYXF6012V</b>
Incandescent, Class 1, Div 1 Groups C & D, 12V, inline transformer	75	720	16/3 SOW	60 ft.	<b>BRYXI6012V</b>
Fluorescent, Class 1, Div 1 Groups C & D, Class 2, Div 1 Groups F & G, 120V, less plug	26	1,800	16/3 SOW	50 ft.	<b>BRYXF50120V</b>
Incandescent, Class 1, Div 1 Groups C & D, 120V less plug	100	1,230	16/3 SOW	50 ft.	<b>BRYXI50120V</b>
Fluorescent, non-explosion proof, wet location, 12V, inline transformer	13	825	18/2 SJTOW	60 ft.	<b>BRYWT6012V</b>

### Cordless Hazardous Location Light

Description	Wattage	Lumen Output	Rating	Catalog Number
Intrinsically safe, Class 1, Div 1 Groups C & D, with universal charger	9	378	4.8V	<b>BRYIS300</b>



**BRYML2825L**



**BRYWL25LED**



**BRYTW25F2**



**BRYML5025**



**BRYWL2525**



**BRYXF6012V**



**BRYXI6012V**



**BRYXF50120V**



**BRYIS300**

WORKLIGHTS AND EXPLOSION PROOF





## Commercial Lighted Cord Reels with Hand Lamps

Description	Wattage	Lumen Output	Light Amps /Outlet Amps	Volts	Cord Type	Cord Length	Catalog Number
Reel with LED hand lamp, with flashlight end, white	9	920/120	0.065 / N/A	125	18/2 SJTOW	40 ft.	<b>BRYC40182LED</b>
Reel with non-metallic incandescent hand lamp and automatic shut off switch, yellow	75 Max	1,150 Max	N/A / N/A	125	16/3 SJT	25 ft.	<b>BRYC25163AIN</b>
Reel with metallic incandescent hand lamp with receptacle, yellow	75 Max	1,150 Max	N/A / 10	125	16/3 SJT	25 ft.	<b>BRYC25143IN</b>
Reel with fluorescent hand lamp and automatic shut off switch, white	13	825	0.3 / N/A	120	18/2 SJTOW	40 ft.	<b>BRYC40182AFL</b>
Reel with fluorescent hand lamp and in-line receptacle, white	13	825	0.3 / 12	120	16/3 SJT	40 ft.	<b>BRYC40163FL</b>



**BRYC40182LED**

## Also from Bryant

### Watertight Devices




Bryant offers an extensive line of plugs, connectors, receptacles and accessories rated to withstand harsh and wet environments.

### Cam-Type Device and Power Distribution Boxes



Bryant offers a complete line of high quality, Cam-Type plugs, receptacles and accessories. Temporary Electrical Power solutions for demanding applications and environments are also available.

### Electric Cord and Cable Reels



Bryant's NEMA 4X Waterproof, Industrial and Commercial Cord Reels are built to provide safe, convenient power and lighting for demanding industrial applications and institutional environments.

# BRYANT®

[www.bryant-electric.com](http://www.bryant-electric.com)

