



Pool Pump Receptacle Kit

Single Source for Water Pump Hookups

Bryant's Pool Pump Receptacle Kit is a self-contained power source for permanently installed pools and fountains. This new kit offers the convenience of one-stop shopping because all the key components for water pump hookups are contained in a single source.

The compact, 2-gang design provides power and convenient on/off switching for outdoor water pumps. It also reduces the cost of materials and installation because the switch and receptacle are contained in one box, eliminating the need to install separate boxes and covers.

The kits feature a Bryant 20A 120-277V AC single-pole switch and a heavy-duty 20A 125V NEMA L5-20 or a 20A 120-277V AC double-pole switch and heavy duty 250V NEMA L6-20 locking receptacle that helps prevent accidental disconnection of the mating pump plug. Mounting hardware, gasket, closure plugs, wire connector and tri-lingual assembly instructions are included. The kit is UL Listed, CSA Certified and meets NEC Articles 680.22 (A)(1) and 406.8 (B)(1). *Note that this device must only be connected to a circuit provided with ground fault protection.*




Features:

- Tinted lid is aesthetically pleasing in any location.
- High-impact, polycarbonate, while-in-use cover will not rust or corrode.
- 2-gang, die-cast aluminum, weatherproof box
- 125 or 250V heavy duty locking receptacle
- Single-pole or double-pole 20A 120-277V AC switch
- Locking receptacle prevents accidental disconnection of mating pump plug.
- Compact 2-gang design
- While-in-use cover is NEMA 3R rated.



Locking receptacle helps prevent accidental disconnection of mating pump plug. Labor-saving, 2-gang design eliminates the need to install separate boxes and covers.

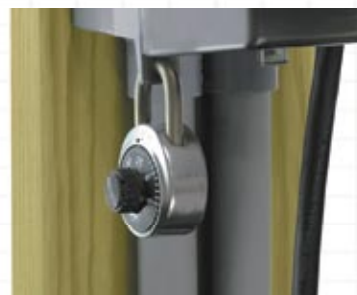

While-in-use cover protects switch and receptacle from weather and dirt while in use. Can be locked for added security. (Lock not included.)



Eye catching, full color, point-of-purchase carton graphics inform the buyer and enhance merchandising opportunities.



Ordering Information

Catalog Number	Description
PKL520	20A, 125V pool pump receptacle kit. Includes a Nema L5-20 receptacle and single pole 20A 120-277V AC switch
PKL620	20A, 250V pool pump receptacle. Includes a NEMA L6-20 receptacle and a double pole 20V 120-277V AC switch



Specifications

Materials

Cover Base	Polycarbonate
Cover Lid	Polycarbonate (tinted)
Box	Die-cast aluminum
Gasket	Cross-linked polyethylene
Locking Receptacle	
Face	Nylon
Base	Reinforced thermoplastic polyester
Switch	
Toggle	Nylon
Base	Thermoset

Listings

UL Listed
CSA Certified

Pool Kit Contains:

- Heavy-duty, industrial-grade locking receptacle (NEMA L5-20, 20A, 125V or NEMA L6-20, 20A, 250V)
- Single-pole or double-pole switch (20A, 120-277V AC)
- 2-gang, 2" deep die-cast aluminum weatherproof box with (4) 3/4" threaded outlets
- 2-gang, weatherproof while-in-use cover
- Includes mounting hardware, gasket, wire connector, (3) closure plugs
- Complete assembly instructions

Also Available from Bryant: Generator Power Connection Kit



Features

- Extra deep weatherproof box gives installers the room needed to wire the box efficiently
- State-of-the-art powder-coated finish provides years of protection against the elements
- Installation hardware, gasket and ground screw are provided
- Male receptacle is securely mounted to the cover for additional durability

Catalog Number Description

RB58405	NEMA L14-30 30A 125/250V; 3-pole 4-wire generator kit
----------------	--

Generator Kit contains:

- Heavy duty industrial grade male base integrated with cast aluminum weatherproof cover.
- Single gang, 2" deep cast aluminum box.
- Mounting hardware, grounding screw and gasket.

Bryant Locking Plugs & Connectors



Features

- Impact/chemical-resistant toughened nylon construction
- Internal "self-centering" Tripple-Gripper® cord grip with "radius teeth" design
- Double Wall Construction

Catalog Numbers

Catalog Numbers	Description
70520NP	Plug NEMA L5-20, 20A, 125V
70620NP	Plug NEMA L6-20, 20A, 250V
71430NC	Connector NEMA L14-30, 30A, 125/250V